



RIGHT STUFF EQUIPMENT

APOLLO PISTON FILLING MACHINE

The Right Stuff Equipment Apollo Series of piston fillers provides great options to fill a variety of products and volumes. There are two basic designs for different types of products.

The first is specific to water thin and light viscosity products only. It uses a stem valve and is not suitable for heavy viscosity or products with particulates. These are the least expensive and have SLF and DLF (Single Liquid Filler and Double Liquid Filler) in their model numbers.

The second style is for products ranging from thin to thick and particulate products. This style has (SPF and DPF Single Paste Filler and Double Paste Filler) in the model numbers.

Both styles can be purchased as a table top unit or with an optional stand that comes with or without casters.

All models have easy volume adjustment knobs to dial in the target volume quickly.

All models have flow controls to adjust the speed of the fill.

All models employ quick release, sanitary fittings making cleaning tool-less and easy.

Heater pack options are available to help reduce the viscosity of thick products or assist running hot fill products.

When operating, the user can fill a hopper attached to the filler or in the case of thinner products, draw directly from a drum or tank. The filler operates in single cycle or auto mode. In the single cycle, each fill is activated by a foot pedal. With the flip of a switch, the filler is in auto mode and cycles automatically.

STAINLESS STEEL
CONSTRUCTION



FILLING APPLICATIONS

LIQUIDS

CREAMS

GELS



Rotary Valve Filling Machine

Filling Ranges

SPF / DPF	5-50 ml
SPF / DPF	15-150 ml
SPF / DPF	30-300 ml
SPF / DPF	60-600 ml
SPF / DPF	100-1000 ml
SPF / DPF	500-3500 ml
SPF / DPF	1000-5000 ml


Piston Liquid Filling Machine

Filling Range

SLF / DLF	5-50 ml
SLF / DLF	15-150 ml
SLF / DLF	30-300 ml
SLF / DLF	100-1000 ml
SLF / DLF	500-3500 ml
SLF / DLF	1000-5000 ml

FEATURES

- Machines fill from water thin to creams, gels and other food products
- Available with 1 or 2 Heads in a variety of volume ranges
- Cone shaped stainless steel product hopper with cover
- Filling Speeds: Up to 20 b.p.m. (depends on product and container size)
- Fill accuracy: +/- 0.5%
- Air Requirements: 2-7cfm depending on model @ 90-psi
- Tool free strip down for easy cleaning
- 304 stainless steel sanitary tri-clamp connection, connection "T's", product cylinder, and contact parts.
- Suitable for food and supplement applications.
- Bottom close positive shutoff nozzles option ensures drip free operations (sized for your application)
- Small footprint for simple bench or stand mounting
- Pneumatic operation suitable for hazardous areas or wash-down facilities
- Replacement parts always in stock
- A variety of "O" rings available for your product requirements
- Free phone support
- Easy adjustment for fill levels within model range

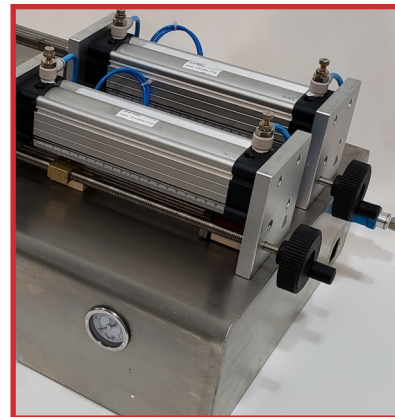

RIGHT STUFF EQUIPMENT

1605 E. 69TH AVENUE
DENVER, CO 80229

PHONE: 303.327.4704
FAX: 303.327.4708

WWW.RIGHTSTUFFEQUIPMENT.COM

